



### Monkey Tail Sprung Inline Lever Lever



#### Features

- **Stylish Monkey Tail Handle**  
Developed to replicate traditional forged hardware in appearance and durability
- **Supplied with screw and spindle pack to suit 44-48mm profiles**  
Everything needed for installation included
- **Colour coordinated screw heads**  
Perfectly matching hardware, even down to the smallest details
- **Solid die cast construction with heavy duty spring cassette**  
Sturdy feel and consistent 90 degree lever return
- **Wide backplate**  
To suit cylinder guards and accommodate larger cylinder preparation
- **Supplied with care instructions**  
Helps the homeowner to keep the hardware in optimal condition
- **Supplied fully assembled**  
Simple and quick installation, no need to fit springs or lever
- **Silicon Site-Protectors available**  
Ensures perfect condition after installation
- **Each part packaged in a separate chamber, but supplied as a set**  
No scratching of parts during transit

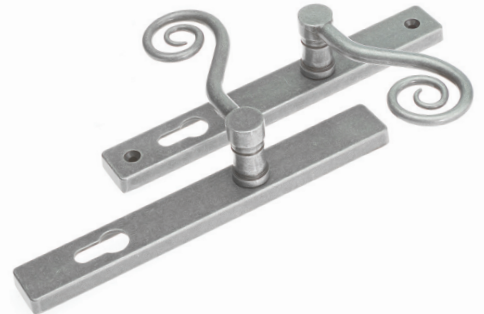

Forged  
Black



Hardex  
Pewter

# Monkey Tail Sprung Inline Lever Lever

## Ordering Details

### Product

#### Monkey Tail Inline Lever Lever

Finish	Part No.	Left Hand	Right Hand
Forged Black		DHMMKT-LH-FB	DHMMKT-RH-FB
Hardex Pewter		DHMMKT-LH-PT	DHMMKT-RH-PT

For additional part numbers please contact our sales office.

## Technical Information

### Corrosion resistance

Meets the requirements of BS EN 1670:2007 Grade 5 (480 hours)

### Operation



Endurance tested in excess of 200,000 cycles

### Performance

Tested to meet the requirements of PAS 24 as part of a compliant door set.

## Material Specification

Handle Grip and Backplate:	High quality Zinc for all finishes.
Coatings:	Forged Black and Hardex Pewter
Spindle / Screws:	Machine screws with colour coordinated heads for handle. 44mm - 48mm profiles (1 x 8mm x 90mm spindle; 2 x 60mm M5 screws)
Cylinder:	Euro Cylinder, 92mm PZ

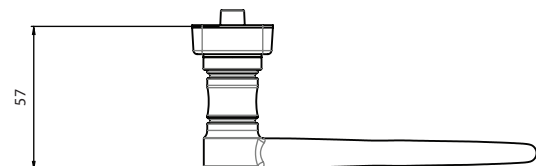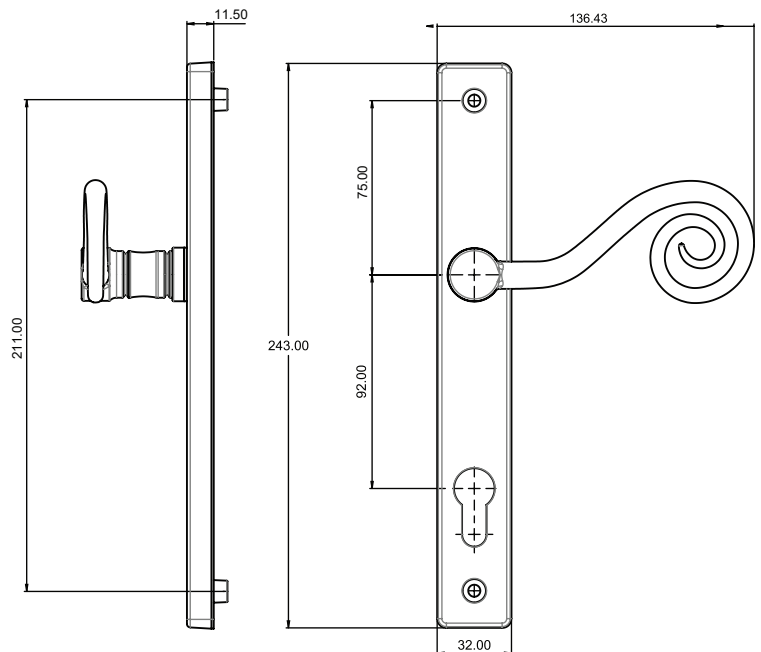


## Maintenance

For continued protection of the quality finish and appearance, Fab&Fix advise routine cleaning of all our external hardware. Moving parts should also be lightly lubricated at least twice a year. This procedure is particularly essential if products are used within a 25-mile radius of coastal areas or close proximity to building sites or large industrial areas, where more frequent cleaning may be required to prevent the accumulation of corrosive contaminants.

## Packaging

### Handles

Individually bagged with screws, spindle and care instructions.  
15 handles in an outer box.

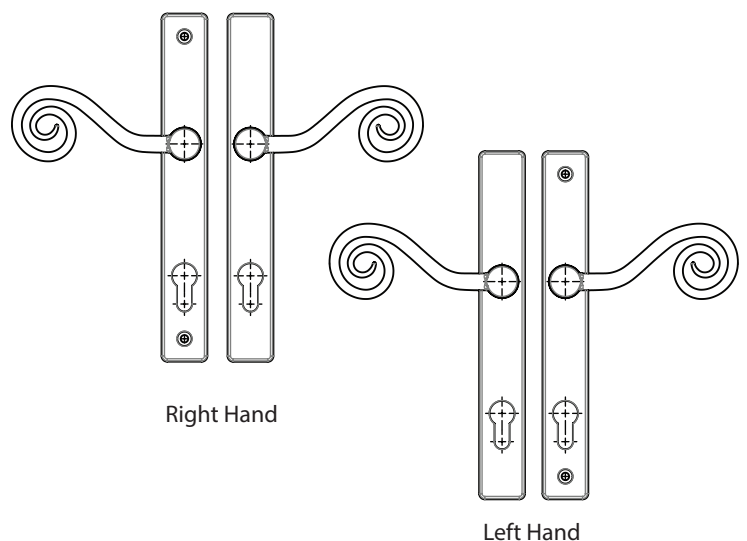

All dimensions are in mm and are nominal.  
Fab&Fix reserves the right to change specification without notice.  
It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification.