☐ Order ☐ Quote

Conservatory - Global Roof - Rehau 70mm

Viewed From Outside

ICENI WINDOWS & DOORS

46 Stepfield Road, Witham, Essex, CM8 3TH

Tel: 01376 519279 Fax: 01376 515669

Email: orders@iceniwindows.co.uk

Invoice name & address:

Tel: Fax:

Email:

Please select one of the following delivery options, we cannot guarantee to deliver on the same date if site addresses are advised after we have confirmed the delivery date.

☐ Deliver to Invoice address ☐ Deliver to site ☐ Collection

Delivery address:

Page: of

Reference:

Date:

Date required:

All dimensions to be internal cill size. Please indicate rainwater outlet positions

Pitch ..... degrees

Minimum Height ..... mm to underside of wall plate

Maximum Height ..... mm to top of cresting

Finish			Finial	Bar Cappings	
Int	Ext		☐ None	Int	Ext
☐	☐	Standard White	☐ Plain (pvc)	☐	☐ PVC
☐	☐	Anthracite Grey *	☐ Ornate (pvc)		☐ Aluminium
☐	☐	Black Brown *	☐ Ball (alu)		
☐	☐	Chartwell Green *	**Cresting**	**Roof Vents**	
☐	☐	Cream *	☐ None	☐	Manual Chrome handle
☐	☐	Golden Oak	☐ Plain (pvc)	☐	Manual Brass handle
☐	☐	Irish Oak *	☐ Ornate (pvc)	☐	Electric
☐	☐	Mahogany	☐ Infill (alu)	☐	Climate
☐	☐	Rosewood	☐ Lean-Too Firrings		
☐	n/a	White Foil	☐ Bi-Fold Heavy Duty Ring Beam		
☐	☐	RAL *	☐ Gable Support Beam		
* Extended Lead Time					
			Tie Bars ☐ 3 Way ☐ 5 Way		

Glazing

Polycarbonate — Glass 4-16-4 Toughened - All Ecoclean & Warm Edge bar & Argon

25	35		Blue	Green	Neutral		U Value
☐	☐	Unglazed	☐ 61%	☐	☐	Low E	1.2
☐	☐	Clear	☐ 67%	☐	☐	4S	1.0
☐	☐	Bronze	☐ 80%	☐ 78%	☐ 67%	Sunshield & 4S	1.0
☐	☐	Opal	**Percentages are Solar Reflection**				
☐	☐	Bronze/ Opal					
☐	☐	Heatguard					

Frame Options

☐ Wall glass match roof but NEUTRAL

A Rated	**Glazed**
☐ B Rated	☐ Unglazed
☐ Bevel Frame	☐ Bevel Sash
☐ Edge Frame	☐ Edge Sash
Ogee Bead	☐ Bevel Bead
Sash Hooks	☐ No Hooks
☐ No Cill & FD	☐ 95mm Cill
150mm Cill	☐ 180mm Cill

Furniture Colour

☐ Antique Black

☐ Black	☐ Graphite
☐ Bronze	☐ Satin
☐ Chrome	☐ White
☐ Copper	☐ Smoke
☐ Gold	☐ Monkey

Transom Drop:

Door options

Threshold

72mm Pvc ☐ Low Pvc ☐ Alu

☐ Open Out ☐ Open In

☐ Master Left ☐ Master Right

☐ Restrictor

☐ Hinge Hooks

Joiner

☐ 2mm PVC ☐ 24mm Alu

Bay Poles

135 Fixed will be used 133 to 137

150 Fixed will be used 148 to 152

☐ Bay Jacks to all poles

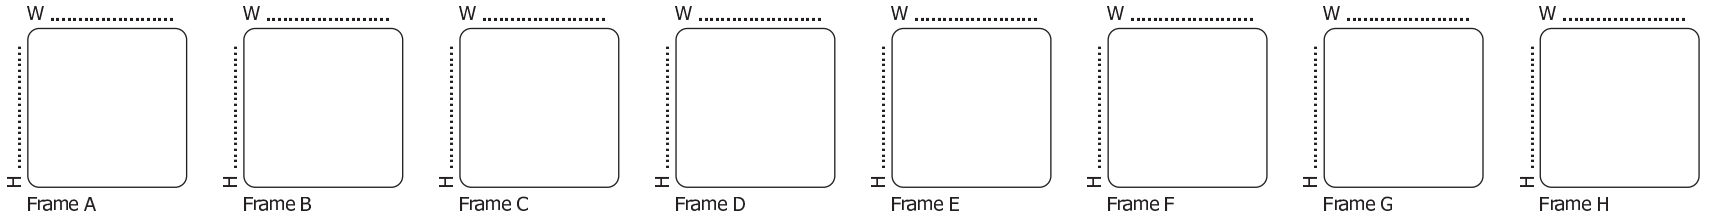

Standard Specification:

Large frame to head of all products

All cills reinforced

300mm Horns added to all cills

Toughened glass to all units

Abbreviations: **D** = Dummy sash

Frame construction will be of Rehau 70mm profiles, fully welded & grooved joints, internally glazed with black co-extruded gaskets. Kenrick Shootbolts to all casements, 90 degree stays to side hung casements, Kenrick door locks, flag hinges, twin handles to french doors both with shootbolts. Fab and Fix furniture.
As standard frame beads will accept only a 28mm unit.

Important: Before ordering please ensure that you are familiar with our products and specifications as we will not accept responsibility for want of knowledge in the event that items do not meet with your requirements. Ordering these products you are automatically acknowledging our standard Terms and Conditions of Sale.