





Iceni Installer Guides

DYNAMIC 2D-C HINGE FITTING AND ADJUSTMENT INSTRUCTIONS




Fitting

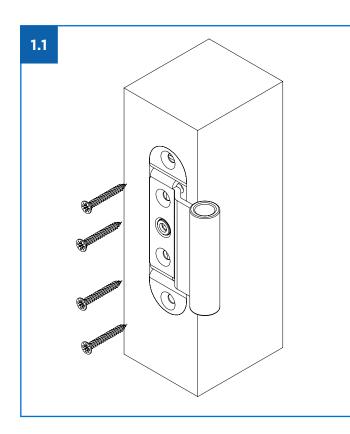

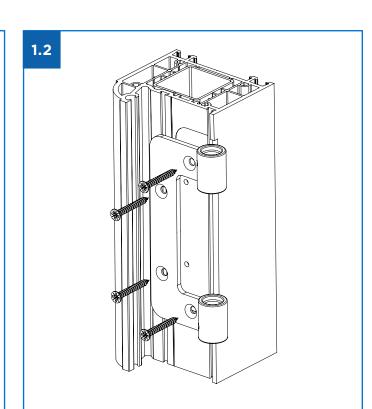

Fitting instructions


- **1.1** Fit the female part in the sash and fasten with 4 screws.
- **1.2** Fit the male part in the frame and fasten with 4 screws.
- 1.3 Drive in the pin with head b into the upper ring. Drive in the pin a until you achieve the dimension as shown.

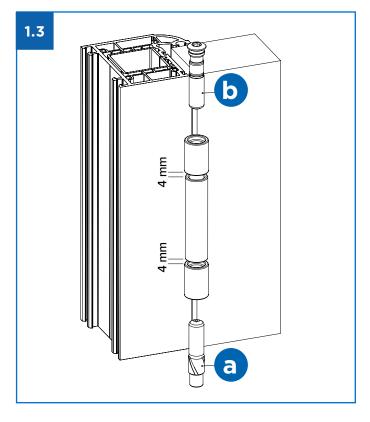





Fitting instructions continued

- Open the door and screw in the security screws marked 1 and 2.
- **1.5** Insert caps and cover cap.

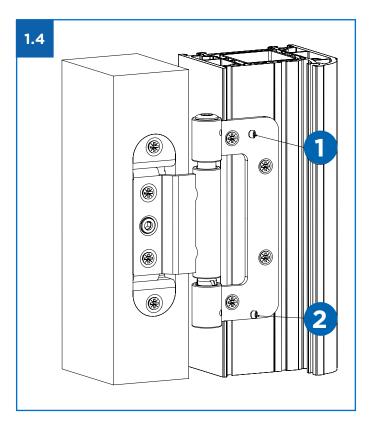

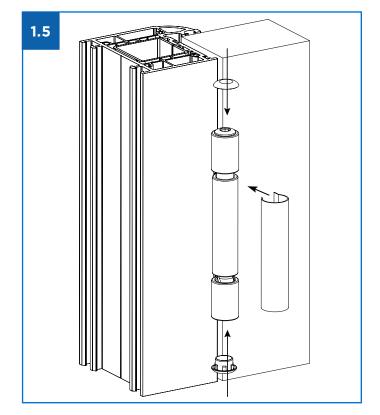

Adjustment

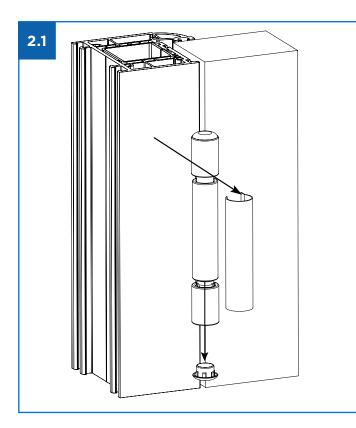

- **1.6** Remove the lower cap and the cover cap.
- 2.2 Open the door and unscrew butdo not fully remove the lower securityscrew marked 2.


2.3a Horizontal adjustment


To increase the air gap between sash and frame loosen screws **d**, adjust by turning screw **c** with a 4mm Allen key

To reduce the air gap turn screw **c** and tighten screws **d**.

Height adjustment

Adjust by turning screw a with a 4mm Allen key

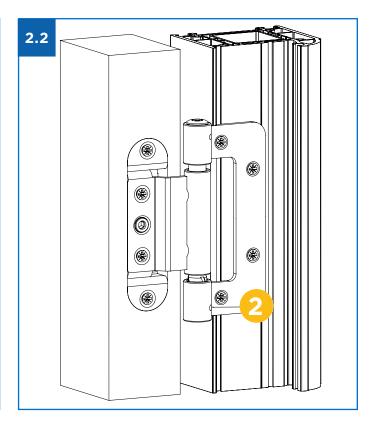


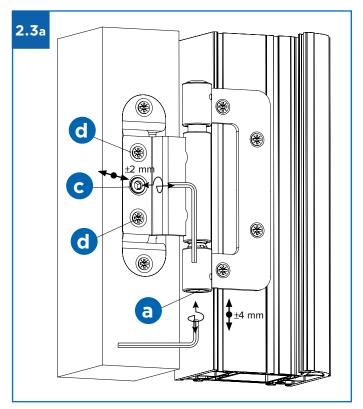




Fitting instructions continued

- 2.4 Open the door and tighten security screw 2.
- **2.5** Replace the lower cap and the cover cap as shown.

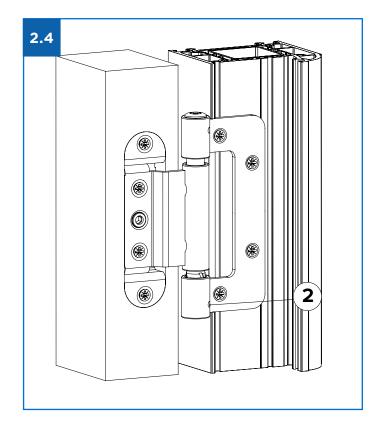

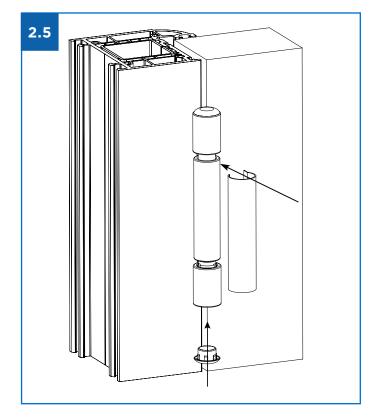



Iceni Windows Ltd. 46 Stepfield, Witham, Essex, CM8 3TH 01376 519279 sales@iceniwindows.co.uk

www.iceniwindows.co.uk



